


FF38

Multipoint Precision Fever Finder

The Multipoint Precision Fever Finder (model FF38) is ideal for fast and reliable fever temperature measurement. Unlike thermal imaging cameras, the FF38 uses germanium sensors from Germany that can accurately measure to a $\pm 0.4^{\circ}\text{C}$ tolerance ($33\sim 37^{\circ}\text{C}$) with 0.1°C resolution.

The FF38 has 14 infrared sensors aligned from top to bottom, ensuring the ability to cater for different heights of people from children to adults. The sensors will take the maximum temperature from any exposed part of the body. Due to the proximity of the sensors, the FF38 has an effective operating distance to the target of around 20~40cm, hence the measurement repeatability is greatly improved.

The entire system only needs minutes to set up and most of the parameters are already factory adjusted. The FF38 only requires a 220V power source for operation. An optional large LED monitor can be supplied with the FF38 to improve readability of temperature from larger distances (6cm red bright LED) and an audio alarm will automatically set off when a feverish condition is detected.

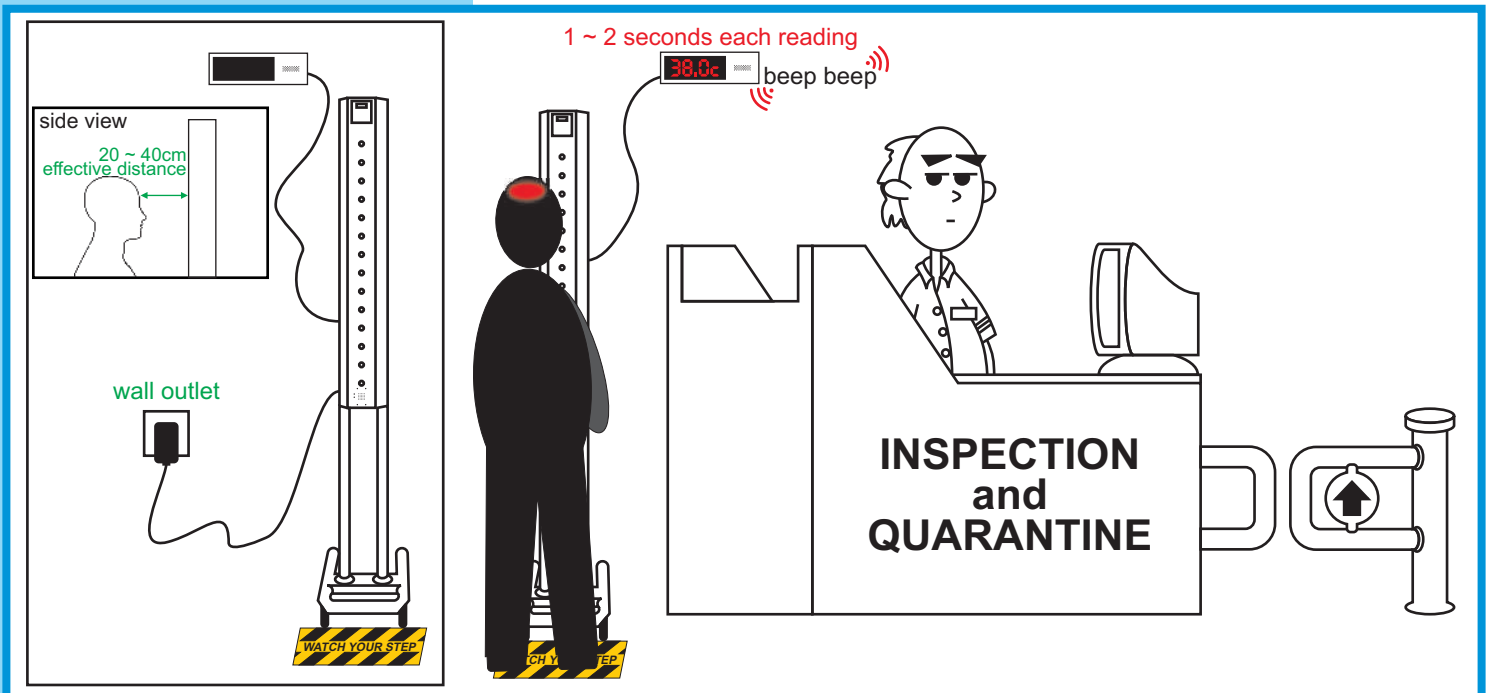

For more Information please
call or email us

GSR Laser Tools
Unit 7 / 7 Prindiville Drive
Wangara WA 6065
Ph: 08 9409 4058
sales@gsrlasertools.com.au
www.gsrlasertools.com.au



Technical Specifications

Detector	: Germanium type from Germany
No. of detector	: 14 points
Temperature range	: $33 \sim 43^{\circ}\text{C}$
Resolution	: 0.1°C
Accuracy	: $\pm 0.4^{\circ}\text{C}$ ($33 \sim 37^{\circ}\text{C}$) $\pm 0.6^{\circ}\text{C}$ ($>37 \sim 43^{\circ}\text{C}$)
Effective operating distance	: 20 ~ 40cm
Alarm function	: settable
Power supply	: 220V 50Hz (adaptor 9 ~ 12V DC 1A)
Operating temperature	: $10 \sim 35^{\circ}\text{C}$ (ambient)
Height of the unit	: 150 ~ 220cm (adjustable)

External LED display monitor optional

Monitor size	: 34.8 x 9 x 3cm
LED dimension	: 6cm
Product net weight	: $\pm 18\text{kg}$
Base	: supplied with wheels



**Measuring, levelling
and layout solutions
for all trades**

Mining - Aligning - Engineering - Environmental - Civil Construction
Surveying - Geological - Glass Testing - Speed Detection

FAQ



1. What is the main difference between thermal imaging cameras and the Fever Finder 38?

The tolerance of general thermal imaging cameras is $\pm 2^{\circ}\text{C}$ ($\pm 2\%$) while the FF38 features a tolerance of $\pm 0.4^{\circ}\text{C}$ ($33 \sim 37^{\circ}\text{C}$). In general, normal thermal cameras have poor repeatability.

2. Which system is better? The FF38 or the thermal camera?

Thermal cameras scan over massive targets. However FF38 scans each individual with precision. So thermal cameras are better for larger, moving targets whereas the FF38 is better for one to one operation.

3. Can both the thermal camera and FF38 be used together on site?

Yes, ideally they complement each other. The thermal camera is served as a first defence gate and the FF38 is then used to confirm the feverish condition with more accuracy.

4. How about the investment cost?

A proper fever thermal camera is normally much more expensive than the FF38.

5. Is the FF38 difficult to set up and operate?

No! There is no need for users to manually set up anything as the FF38 is delivered factory adjusted. Computers are not required for operation at all. For basic local monitoring, you only need to plug the FF38 into the wall power outlet and it is ready to go. Minimum supervision is required. However, users still can alter the alarm temperature and offset temperature through the local monitor located on the unit.

6. Does IRTEK have both systems? (thermal camera and FF38)

Yes!

7. Would I still need a portable infrared thermometer if I have the FF38?

No, the FF38 replaces the infrared thermometer without operator intervention and human error.

8. If I need the precision of the FF38 but also a fast enough operating speed to save queuing time, what is the solution?

You can invest in more units of FF38 to save a lot of queuing time. You can invest in say five to six units to achieve the speed and accuracy of a 50Hz thermal imaging fever camera whilst still being cheaper than the camera.

9. Is there any training required to operate the FF38?

Unlike the thermal imaging camera where some basic training is required, the FF38 needs absolutely no training.

10. If I install a few units of the FF38, can we monitor the temperature from a laptop computer we place in a control room?

Not at the moment. We are still working on the control software but all the hardware such as USB connection, RS485 and Wi-Fi is already installed in the standard configuration. You will only need to purchase the software when it is available.