


# LASER BULLET

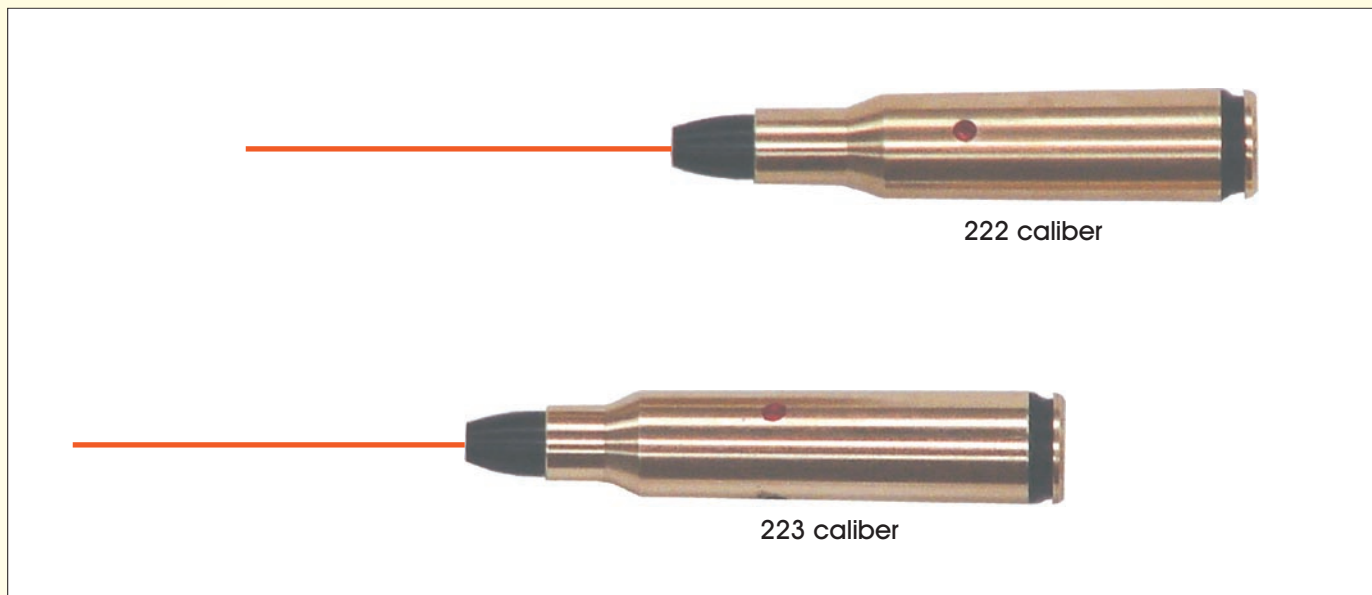

## SPECIFICATIONS

Accuracy:	±5 mm over 35 m
Battery life:	30 min.
Weight:	13.4 g (223 model) 12.2 g (222 model)
Dot size:	approx. 10 mm over 35 m
Power output:	1 mW

Riflemen need to align their scope or site to access true accuracy quickly, and in certain circumstances, without firing a round.

Zero retention can be determined knowing the exact distance between axis of barrel (AOB) and the line of sight (LOS) of their rifle and bullet trajectory at a known range.

That is after zeroing in your rifle at a range with a known bullet power, you record the position (distance) of the laser dot in relation to the point of aim on the target.

An example is at 100 metres distance. The laser dot, the LOS, the AOB and the bullet projectile all align at this distance.

Therefore at any time you can check your accuracy without firing a round by measuring out 100 metres and inserting a laser bullet.



**GSR Laser Tools**  
Unit 7 / 7 Prindiville Drive  
Wangara WA 6065  
Ph: 08 9409 4058  
[sales@gsrlasertools.com.au](mailto:sales@gsrlasertools.com.au)  
[www.gsrlasertools.com.au](http://www.gsrlasertools.com.au)